

Manual Scanner Newland FM 305X

Configuration with EasySet software

V210100


Index

1. Download SOFTWARE	3
2. Start	4
3. CHANGE KEYBOARD LAYOUT.....	6
4. ADD PREFIX & SUFFIX	7
5. Safe CONFIG to RE-USE.....	8
6. SWITCH BACK FROM Com-port to HID Keyboard.....	9
7. BATCH UPDATE	10

1. DOWNLOAD SOFTWARE

<https://www.newland-id.com/service/software-drivers/easyset-software/>

2. START

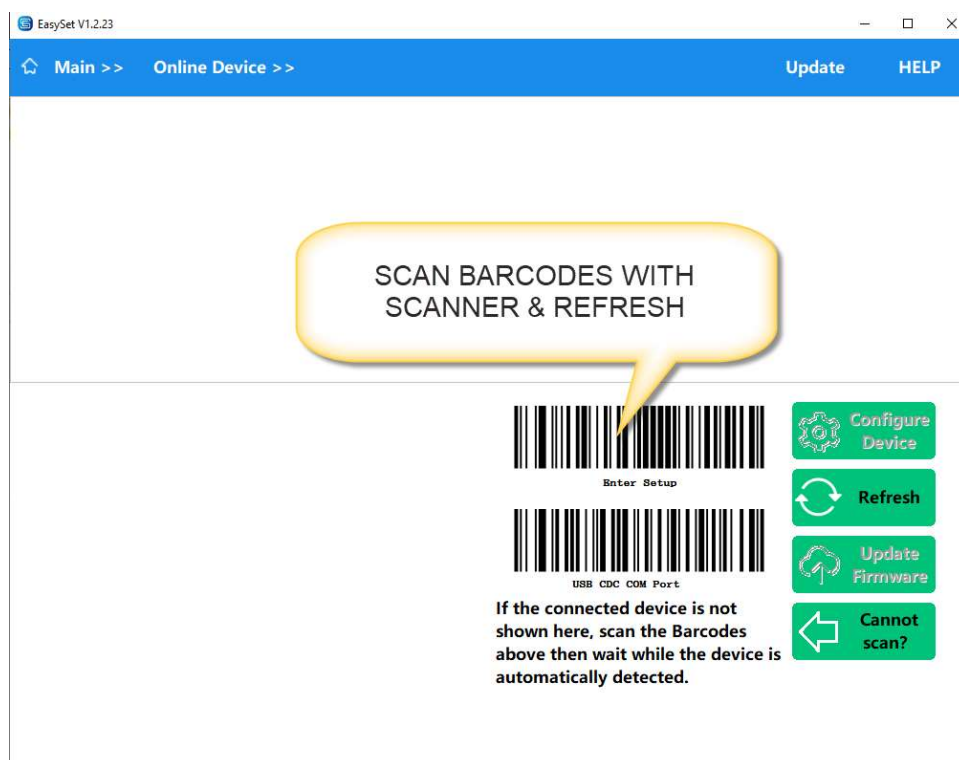



NLS-FM3056-20

Product Name: NLS-FM3056-20
Firmware Version: 1.00.095
Decoder Version: 0390
Hardware Version:
Serial Number: FCAC0010
OEM Serial Number:
Manufacturing Date: 2020-03-13



Enter Setup



USB CDC COM Port

Configure Device

Refresh

Update Firmware

Cannot scan?

If the connected device is not shown here, scan the Barcodes above then wait while the device is automatically detected.



Enter Setup



USB CDC COM Port


Configure Device

Refresh


Update Firmware

Cannot scan?

If the connected device is not shown here, scan the Barcodes above then wait while the device is automatically detected.

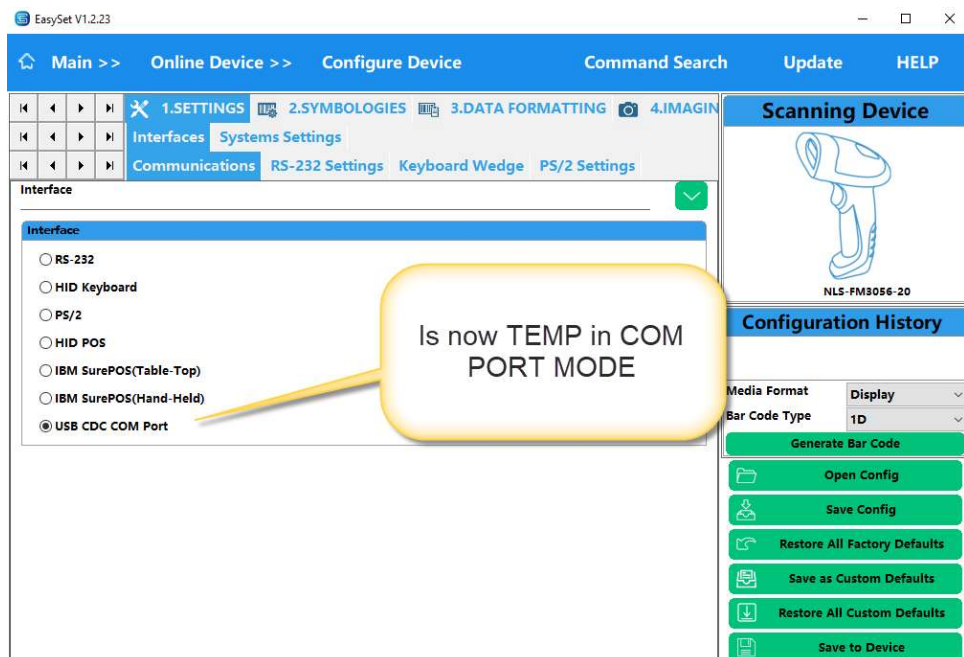


3. CHANGE KEYBOARD LAYOUT

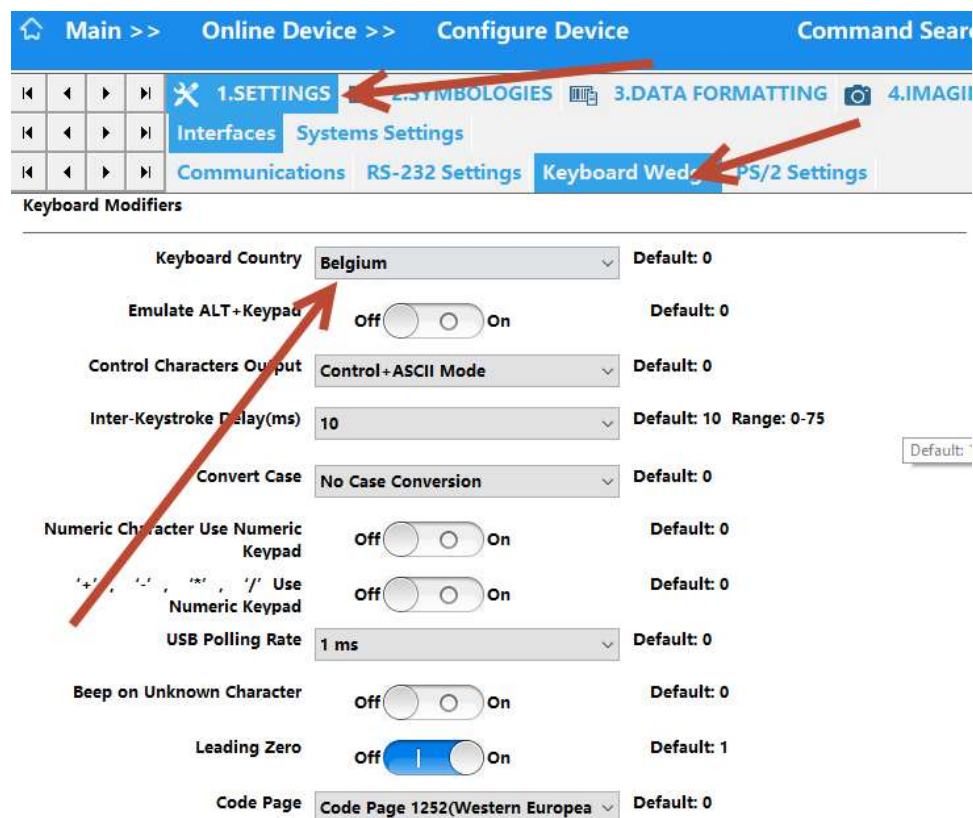

4. ADD PREFIX & SUFFIX

ATTENTION USE HEX codes!!

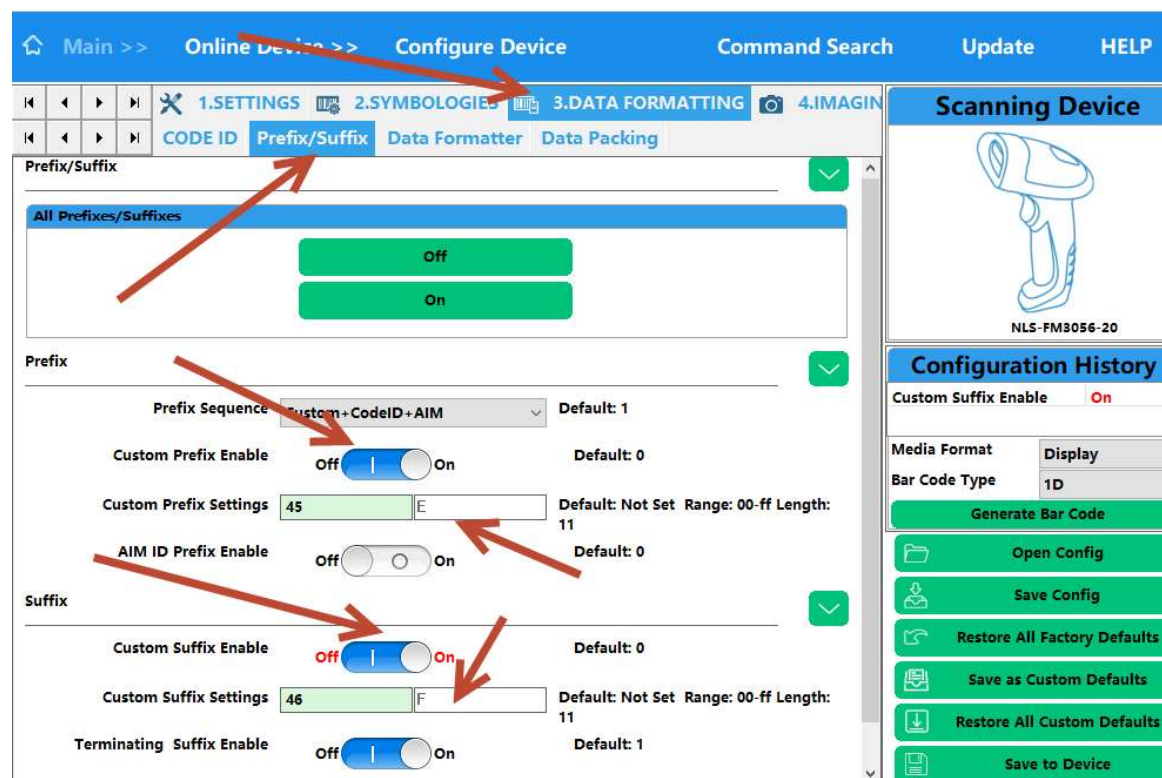

5. SAFE CONFIG TO RE-USE

length:

length:

NLS-FM3056-20

Configuration History

Custom Suffix Settings
46

Media Format

Display ▼

Bar Code Type

2D ▼

Generate Bar Code

Open Config

Save Config



Restore All Factory Defaults

Save as Custom Defaults

Restore All Custom Defaults

Save to Device

6. SWITCH BACK FROM COM-PORT TO HID KEYBOARD

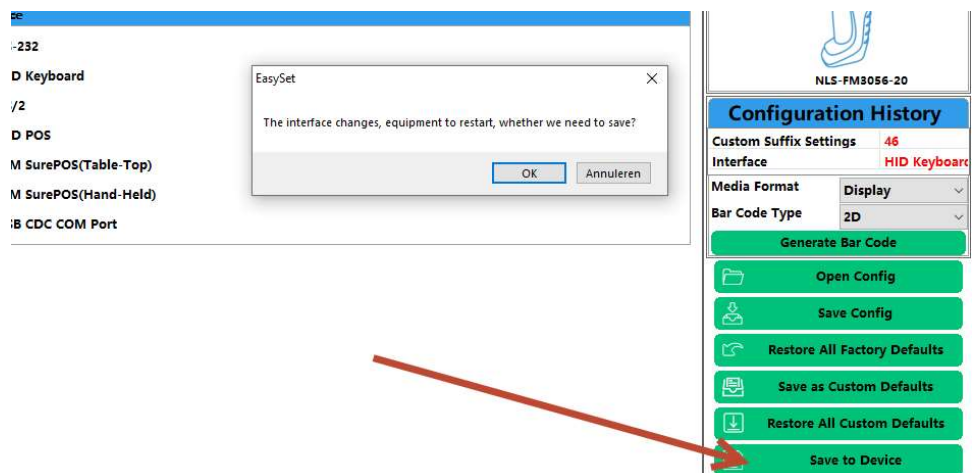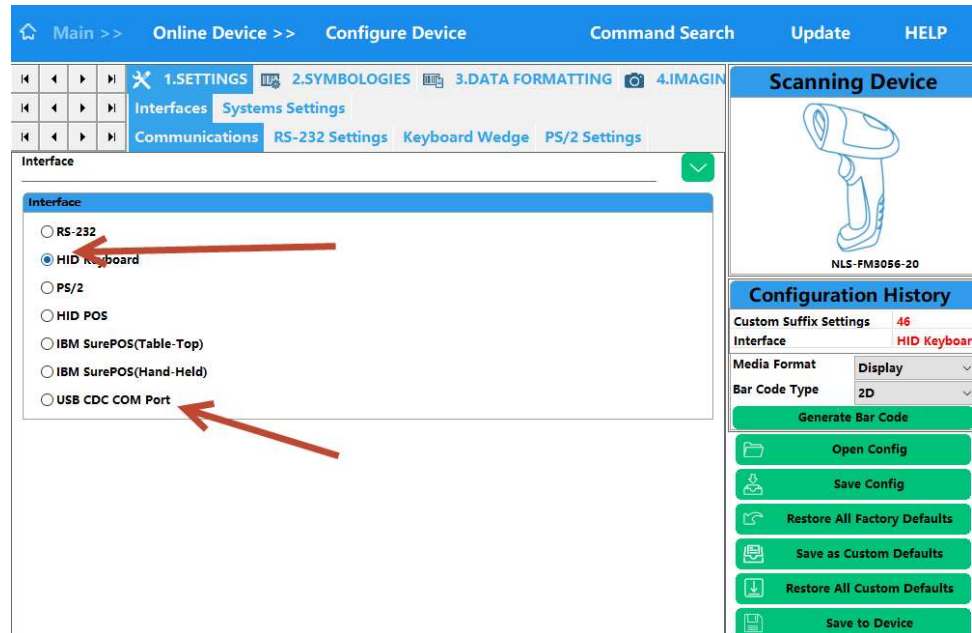

7. BATCH UPDATE

Connect multiple scanners to USB ports of a PC



